

Vturn-40/45/46

Heavy duty turning center



Vturn-40 & Vturn-45 Turning center


Heavy cutting lathe with spindle nose A2-11 for turning length from 1250mm to 4250mm

- Spindle bore A2-11 with hydraulic 15" chuck
- One piece 45° slant bed
- Large swing diameter 780 mm
- Turning length 1250 / 2200 / 3250 / 4250 mm
- 2-step gearbox included
- C-axis and Y-axis available
- Available with Large Spindle Bore (LSB)
160 mm / 205 mm (XSB)

Model	Chuck / spindle speed	Spindle bore	Bar capacity (Hole dia. thru. draw bar)
Vturn-40	15" / 2500 rpm	105 mm	91 mm
Vturn-45	15" / 2000 rpm	135 mm	117.5 mm
Vturn-45LSB	18" / 1500 rpm	160 mm	145 mm
Vturn-45XSB (A2-15)	21" / 1200 rpm 24" / 1200 rpm	205 mm	180 mm 190 mm







2-step gearbox

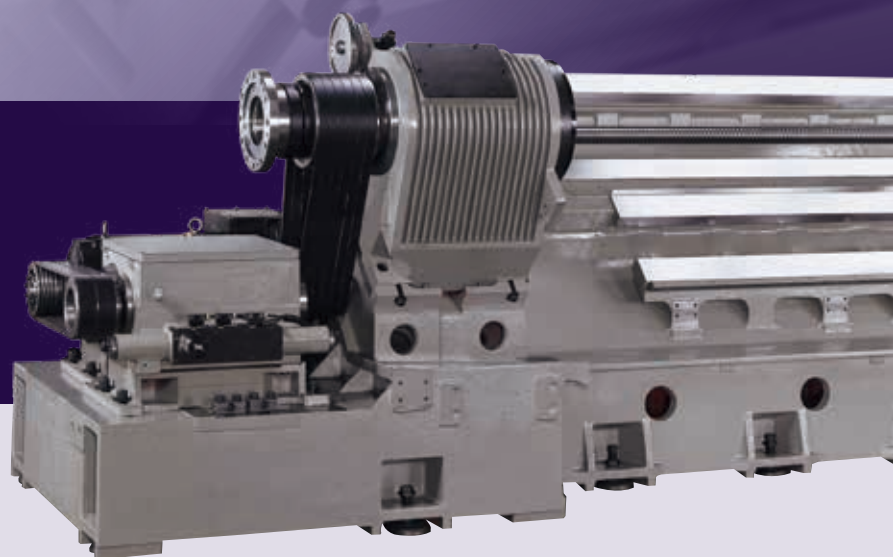

Spindle Torque Output Diagram

- Vturn-40(45) STD



FANUC motor α 30i

Boxways 85/100 mm (X/Z)

- Victor Taichung's own casting
- Hardness HRC 55 ± 3



Certificated Casting

GA350



Victor's own Turret


- Wide span turret carriage upgrades structure stiffness.
- Milling turret (servo driven) available with VDI 50 interface for quick tool change or BMT 75 interface for high rigidity




Tailstock MT5

- Twin cylinder clamping
- **Built in bearings** for fixed center
- Tow along by turret
- Programmable by M code.


Vturn-40/220

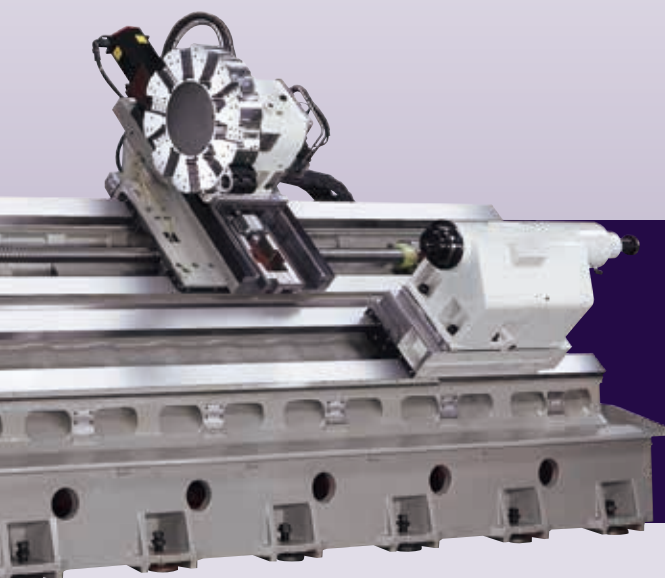


Vturn-40/325

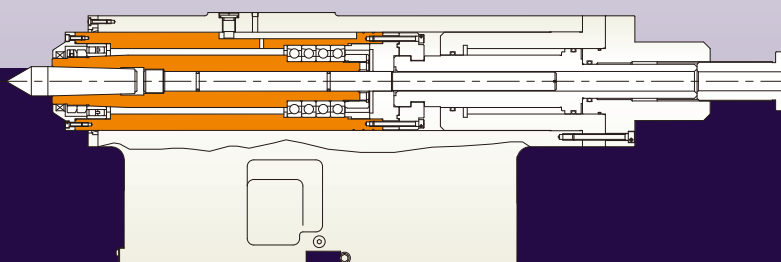


Large Spindle Bore (LSB, optional)

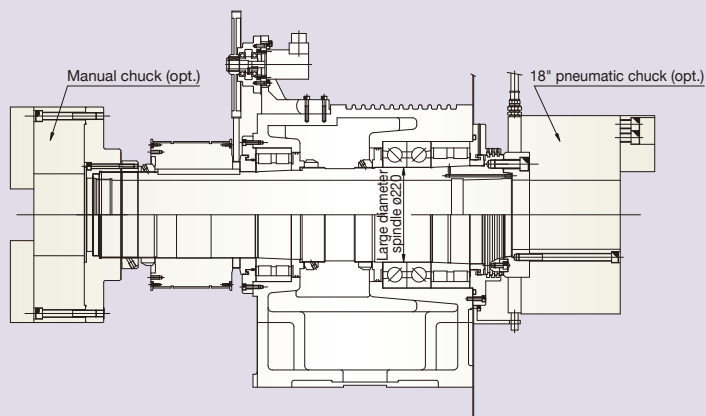

● Vturn-45LSB (with Victor gearbox)

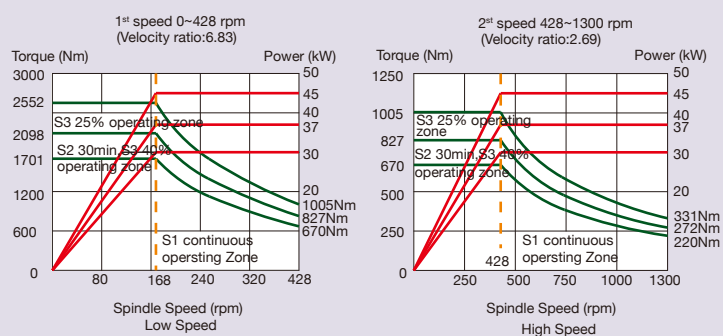

● Vturn-45XSB (with GTP gearbox) (opt. for Vturn-45LSB)

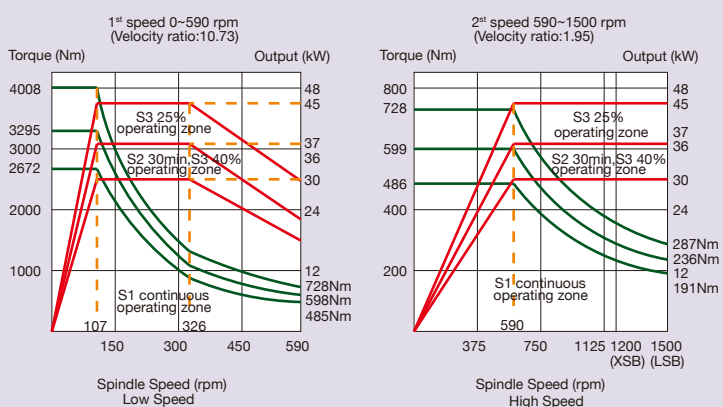

Vturn-40/45 Turning center C axis & Y Axis Application

- 2 step gearbox upgrade (by GTP)
- Victor's own servo turret for quick indexing:
1.0 sec (adj.), 1.2 sec. (opposite)
- Milling turret with VDI-50 disk (6 station live tools)
or BMT-75 disk (12 station live tools)
- Milling power 7kW / 3000rpm




Vturn-45/125




Spindle Output

- Vturn-40 CV/CM/YCM (with GTP gearbox)

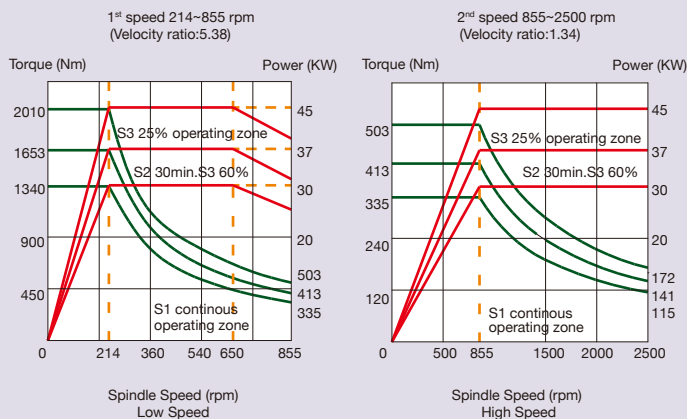

- Vturn-45 (LSB, XSB) CV/CM/YCM (with GTP gearbox)

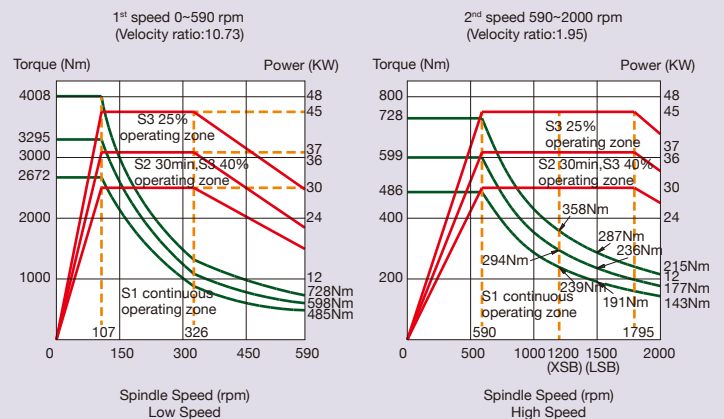

Servo Milling Turret




C axis VDI 50 turret (CV)



C axis BMT 75 turret (CM)




C&Y axis BMT 75 turret (YCM)

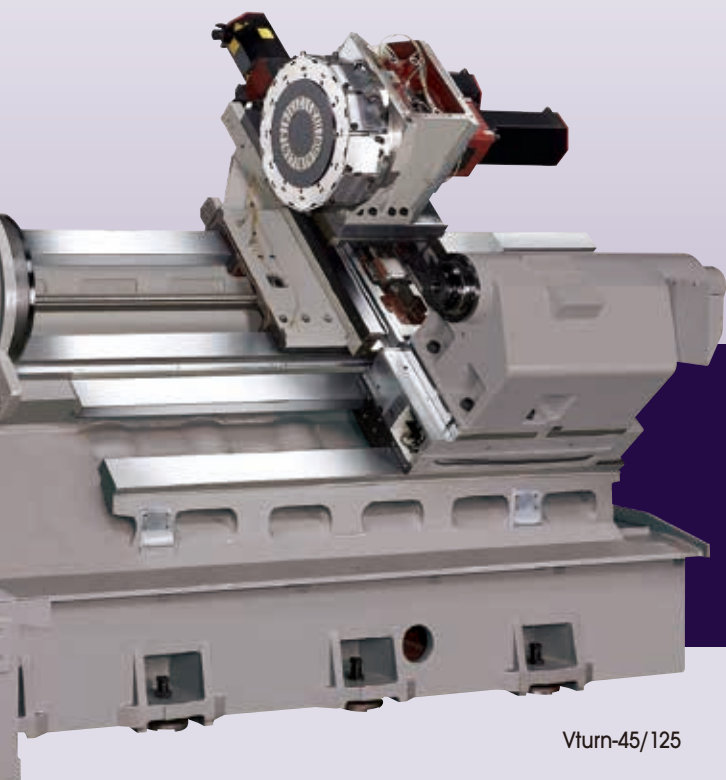





Vturn-45/125

Milling Motor Output

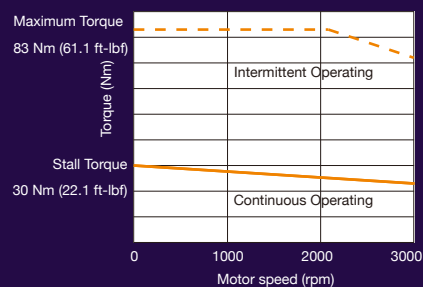

Opt. Built in Spindle 45kW (30 min.)

- Bar capacity 106 mm (spindle bore: 116mm)
- Spindle speed 2500 rpm
- Spindle output 1432 Nm (S3 15 min.)
- Good for contour milling

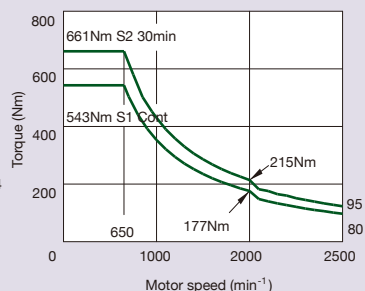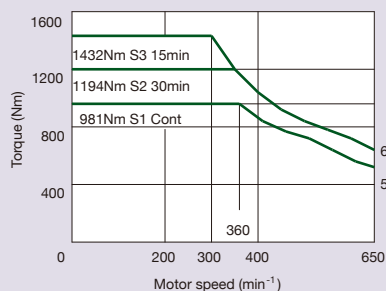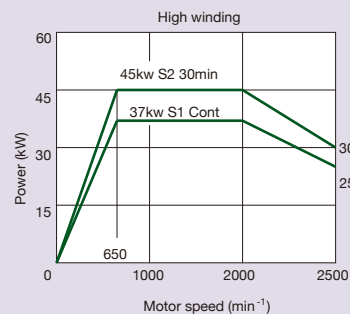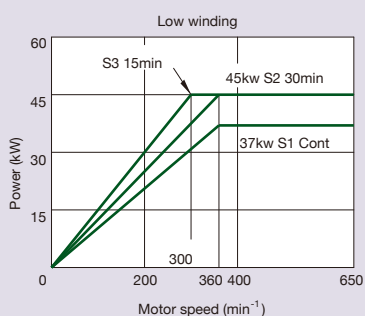


250M (built-in spindle)


Vturn-46 Turning center

Built-in 4-Step Gearbox for powerful heavy cutting!


- Genuine 60° slant bed for minimum distance from Z-axis ball screw to the tool tip so as to reduce the chip built-up.
- Built-in 4-step gearbox inside the headstock further enhances the cutting torque 536.4kg-m at low spindle speed 67rpm.
- Spindle nose A2-11 with hydraulic 15" chuck is offered as standard and available with 18"/21"/24" chucks.
- Z-axis ballscrew diameter 50mm.
- Maximum turning length 1650mm.
- Available with C-axis spindle and live tooling by Victor's own VDI turret.

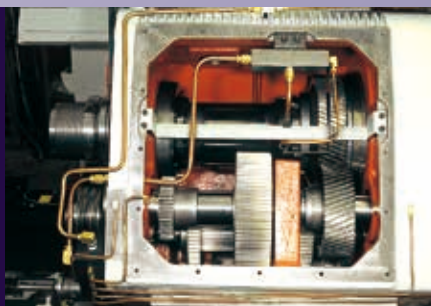

4-step gearbox



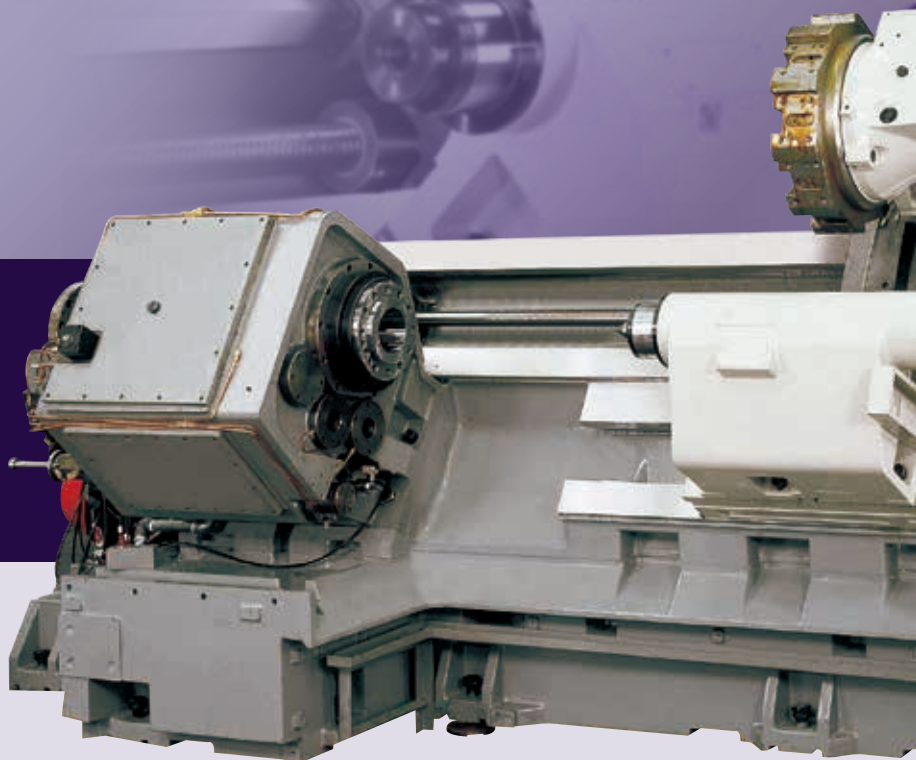


Spindle Torque Output Diagram

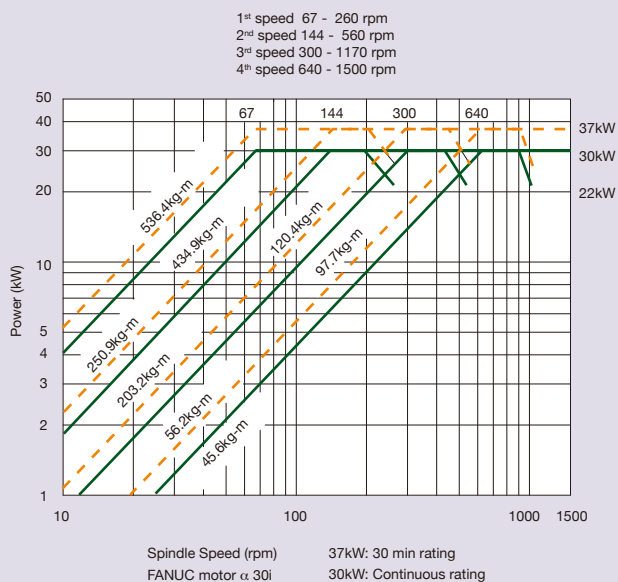

C-axis VDI turret with live tooling (CV option.)

- Live tooling is provided through the use of VDI turret which not only provides an international tooling system but also allows for quick and simple tool mounting.
- Cf-axis design with angular encoder is included as standard to assure high indexing accuracy.
- Coupling specification DIN-5480.
- Milling power 7kW/3000rpm.

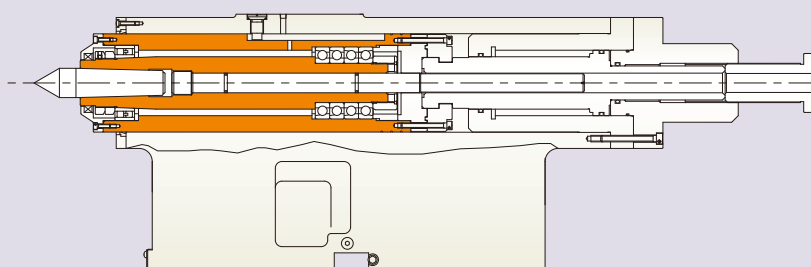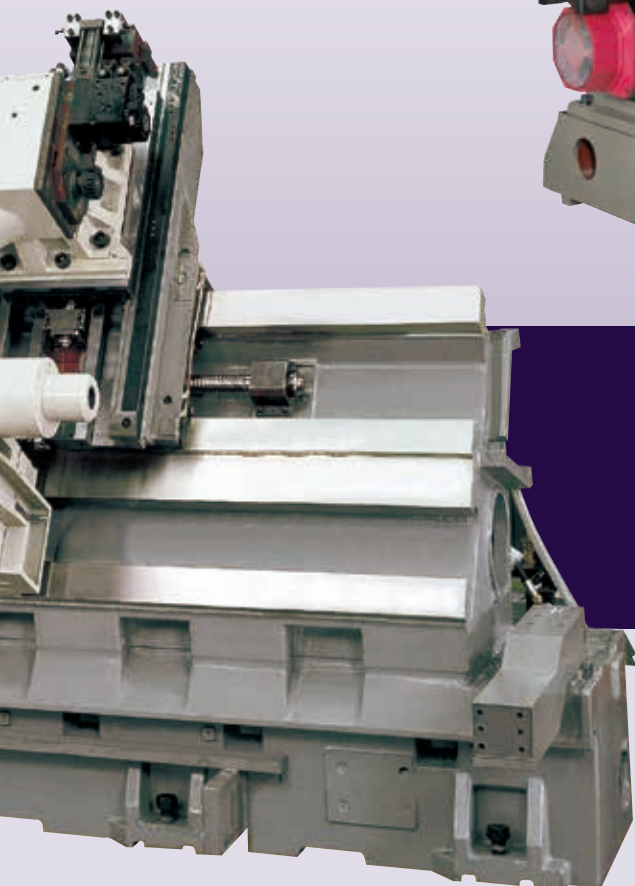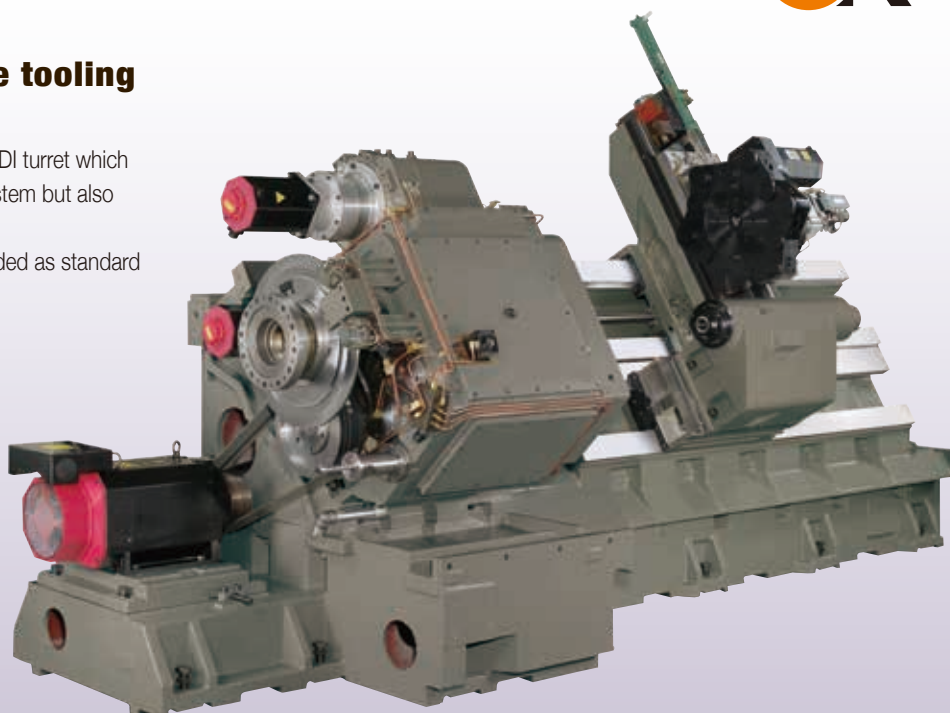

Powerful tailstock

- Built-in bearings for fixed center.
- MT#5 tailstock for powerful engagement.

Vturn-46CV cutting capability on mild steel S45C

	OD turning	Drilling (Z-axis $\alpha 30^\circ$)	Milling	Tapping
Metal removal rate (spindle loading %)	792cc/min (93%)	672cc/min	30cc/min (99%)	-
Tool	$\varnothing 32 \times 10$ mm	$\varnothing 58 \times 35$ mm	$\varnothing 25 \times 15$ mm	M16xP2 (80%)
Spindle speed	686rpm	848rpm	600rpm	300rpm
Feed	F0.35mm/rev	F0.3mm/rev	F80mm/min	F600mm/min

Standard and Options


- Fanuc Oi TF Plus (type 1) control with 10.4" screen
- 15" 3 jaw power chuck
- Programmable tailstock (MT 5)
- Moving CRT (for VT 40/220, 325, 425)
- Coolant flush onto Z axis covers (except Vturn 46)
- Built in LED light
- Chip conveyor
- Air conditioner for electrical cabinet



* Vturn-40/220



* Vturn-40/220Y

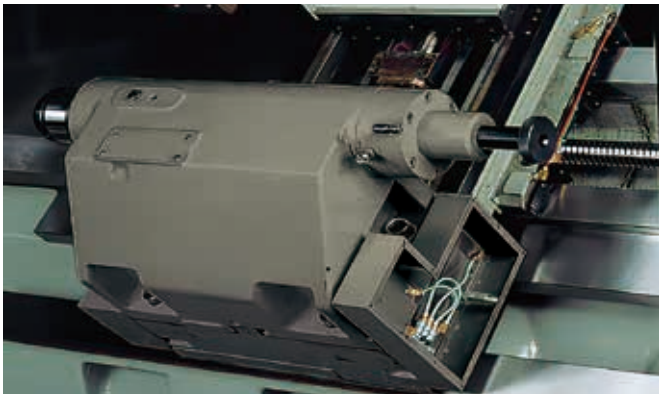

Programmable tailstock


- Mounted on slideways for maximum clamping stability.
- Hydraulic clamping to bed with variable hydraulic pressure to tailstock quill.
- Programmable tailstock (std.)



Oil skimmer (opt. for VT-46)




- Coolant flush (std.)

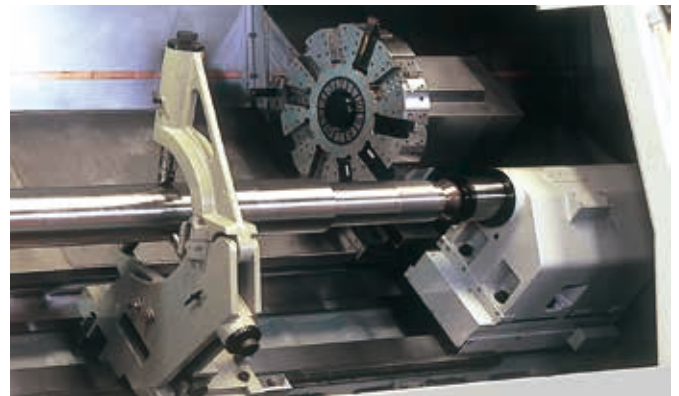

- Manual steady rest (std. for Vturn-40(45)/220, 325, 425)
- Clamping range: 280-400mm (or 150-300mm)

Tooling accessories (excl. VDI or BMT turret model)

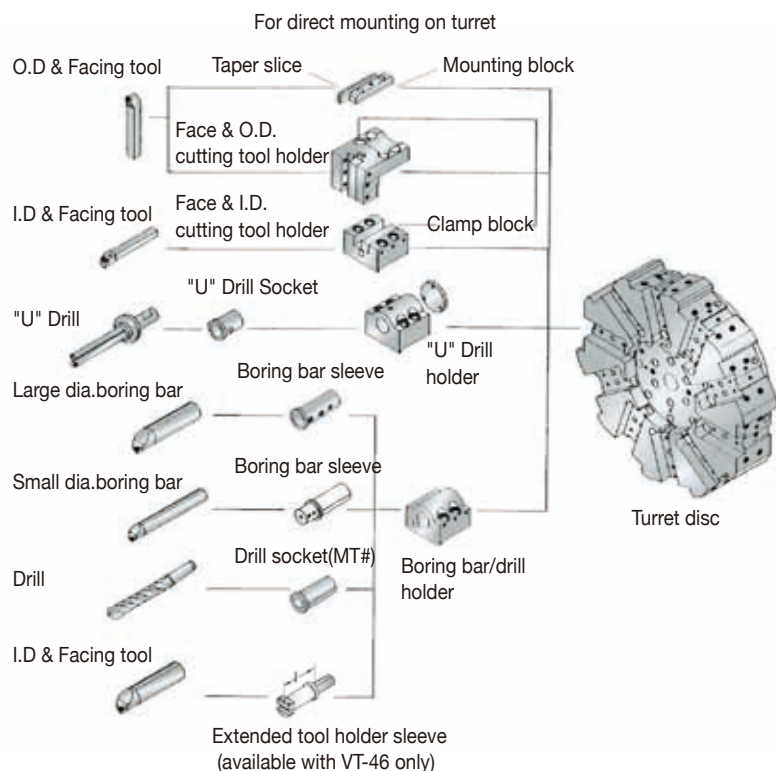

TOOL \ MODEL	Vturn-40 Vturn-45	Vturn-46
Tool shank for turret disk	32 mm	32 mm
Maximum boring bar dia.	50 mm	60 mm
Face + O.D. cutting tool holder	1	1
Face + I.D. cutting tool holder	1	1
Extended I.D. cutting tool holder	-	2
Boring bar holder		
32 mm	-	-
40 mm	-	-
50 mm	5	-
60 mm	-	5
Boring bar sleeve		
8 mm	-	-
10 mm	1	-
12 mm	1	-
16 mm	2	-
20 mm	2	2
25 mm	2	2
32 mm	2	2
40 mm	2	2
50 mm	-	2
Drill socket		
MT1	-	-
MT2	-	-
MT3	Opt.	-
MT4	1	1
U drill holder		
32 mm	-	-
40 mm	-	-
U drill socket		
20 mm	-	-
25 mm	1	-
32 mm	1	2
40 mm	Opt.	2

※Tooling accessories are subject to change without notice.



● Tool presetter (opt.)



● Hydraulic steady rest (opt.)

Machine Color Option (RAL-7024)



Machine Specifications

ITEM \ MODEL		Vtturn-40/125(CM)(Y) Vtturn-40/220(CM)(Y) Vtturn-40/325(CM)(Y) Vtturn-40/425(CM)(Y)	Vtturn-45/125(CM)(Y) Vtturn-45/220(CM)(Y) Vtturn-45/325(CM)(Y) Vtturn-45/425(CM)(Y)	Vtturn-46/165(CV)
MACHINE CAPACITY				
Swing over bed	mm	780	780	820
Std. Turning dia.	mm	520 (492) [432]	520 (492) [432]	520 (468 for CV)
Max. turning dia.	mm	620 [580] [520] (390 for CV)	620 (580) [520] (390 for CV)	730 (528 for CV)
Swing over carriage	mm	620	620	520
Center distance	mm	1325 2275 3235 4305	1325 2275 3235 4305	1750
Hole through draw bar	mm	91 (opt. 106 for built-in spindle)	117.5 (145 for LSB, 180 for XSB)	115
AXIS FEEDS				
X axis travel :				
– Std turret	mm	310 + 30	310 + 30	365 + 25
– VD I turret		125 + 315	125 + 315	137 + 303
– VDI turret, C-axis		107 + 165	107 + 165	186 + 234
– BMT turret, C-axis		290 + 50 [260 + 140]	290 + 50 [260 + 140]	-
Z axis travel	mm	1250 2200 3250 4250	1250 2200 3250 4250	1650
Y axis travel	mm	± 80	± 80	-
Rapid feed – X/Z axis	m/min	24 / 24 20 / 20 20 / 12 20 / 8	24 / 24 20 / 20 20 / 12 20 / 8	12 / 15
Rapid feed – Y axis	m/min	7	7	-
Feed motor – X/Z axis	kW	4 / 4 [7 / 7 (α 30i)] 4 / 7 (α 30i_30Nm) [7 / 6 (α 40i)] 4 / 6 (α 40i_38Nm) [7 / 6 (α 40i)] 4 / 6 (α 40i_38Nm) [7 / 6 (α 40i)]	4 / 4 [7 / 7] 4 / 7 [7 / 6] 4 / 6 [7 / 6] 4 / 6 [7 / 6]	3 / 4 (opt. 3 / 7)
Feed motor – Y axis	kW	4	4	-
JOG feed rate	mm/min	0~1260	0~1260	0~1260
Ball screw dia x pitch – X/Z axis	mm	32 x P8 (X), 50 x P10 (Z) 36 x P8 (X), 50 x P16 (Z) 36 x P8 (X), 63 x P16 (Z) 36 x P8 (X), 70 x P12 (Z)	32 x P8 (X), 50 x P10 (Z) 36 x P8 (X), 50 x P16 (Z) 36 x P8 (X), 63 x P16 (Z) 36 x P8 (X), 70 x P12 (Z)	36 x P6 (X) 50 x P10 (Z)
Ball screw dia x pitch – Y axis	mm	32 x P8 (Y)	32 x P8 (Y)	-
SPINDLE				
Spindle nose (chuck)	inch	A2-11 (15")	A2-11 (15")	A2-11 (15")
Max. spindle speed	rpm	2500	2000 (1500 for LSB, 1200 for XSB)	1500
Spindle motor power (cont./30min/15min)	kW	30 / 37 / 45 with gearbox	30 / 37 / 45 with gearbox	30 / 37 with gearbox
Bearing inside dia.	mm	160	190 (220 for LSB, 260 for XSB)	180
Spindle bore	mm	105	135 (160 for LSB, 205 for XSB)	123
TURRET				
No. of tools	no.	10 (opt. 12) (12 for CV/YCM/CM)	10 (opt. 12) (12 for CV/CM/YCM)	10 (12 for CV)
No. of live tools	no.	6 (CV), 12 (YCM/CM)	6 (CV), 12 (YCM/CM)	6 (CV)
Tool shank size	mm	32	32	32
Coupling dia.	mm	320 (320) [260] (250 for CV)	320 (320) [260] (250 for CV)	320 (250)
Max. boring bar dia.	mm	50 (VDI-50) [BMT-75]	50 (VDI-50) [BMT-75]	60 (VDI-50)
Exchange time (T-T)	sec	1	1	1
Milling speed	rpm	3000	3000	3000
Milling motor	kW	7.0	7.0	7.0
TAILSTOCK				
Quill dia.	mm	150	150	150
Quill stroke	mm	150	150	150
Quill taper		MT#5 (live)	MT#5 (live)	MT#5 (live)
OTHER				
CNC controller (FANUC)		0i-TF Plus (10.4")	0i-TF Plus (10.4")	0i-TF Plus (10.4")
Power requirement	KVA	50 (52 for CV/CM, 64 for YCM)	50 (52 for CV/CM, 64 for YCM)	46 (49 for CV)
Tank capacity	L.	600 700 850 950	600 700 850 950	250
Approx. machine size	m	5.3 x 2.7 x 2.2 [2.9] 7.1 x 2.7 x 2.2 [2.9] 8.5 x 2.7 x 2.2 [2.9] 9.5 x 2.7 x 2.2 [2.9]	5.3 x 2.7 x 2.2 [2.9] 7.1 x 2.7 x 2.2 [2.9] 8.5 x 2.7 x 2.2 [2.9] 9.5 x 2.7 x 2.2 [2.9]	6.2 x 3 x 2.5
Net weight (incl. standard accessories)	kg	12700 (13000) [13300] 15500 (15600) [15800] 17000 (19300) [19500] 22000 (22300) [22500]	12700 (13000) [13300] 15500 (15600) [15800] 17000 (19300) [19500] 22000 (22300) [22500]	12800 (13100)

※Machine and controller specifications are subject to change without notice.

VICTOR Taichung's FANUC Oi-TF Plus 10.4" Control (Type I) Specifications



Standard

ITEM\SPECIFICATION

DESCRIPTION

Controlled Axes:

1. Controlled axes	2 Axes (X, Z)
2. Simultaneous controlled axes	2 Axes
3. Least input increment	0.001mm
4. Least command increment	0.0005mm (X) / 0.001mm (Z)
5. Command system	Incremental / Absolute
6. HRV Control	HRV3+
7. Unexpected disturbance torque detection (AIR-BAG)	Std.
8. Backlash compensation	Std.
9. Stored pitch error compensation	Std.

Operation & Program Input:

1. Input / Output interface	RS-232, PCMCIA Card, USB
2. Tool offset	99 sets
3. Sequence number	N5-Digit
4. Program number	O8-Digit
5. Program name	31-characters
6. M code function	M3-digit
7. S code function	S4-digit
8. T code function	T4-digit
9. Positioning	G00
10. Linear interpolation	G01
11. Circular interpolation	G02, G03
12. Programmable data input	G10
13. Plane selection	G17~G19
14. Inch / Metric conversion	G20 / G21
15. Reference position return	G28, G30
16. Thread cutting	G32, G34
17. Threading retract	Std.
18. Tool nose radius compensation	G40~G42
19. Work piece coordinate system	G52~G59
20. Macro, Sub program call	G65, M98, M99 (10 folds nested)
21. Multiple repetitive cycle I & II	G70~G76
22. Canned cycle for drilling	G80~G89
23. Canned cycles	G90, G92, G94
24. Program stop / end	M00~M02 / M30
25. Rigid tapping (Spindle)	M29
26. Manual Guide i	Std.
27. Optional blocks skip 2-9	Std.

Feed Function:

1. Manual handle feed rate	X1, X10, X100
2. Rapid traverse rate	F0, 25%, 50%, 100%
3. Cutting feed rate	0~150%
4. Spindle override	50~120%
5. Feed per Minute / Revolution	G98 / G99

Edit Operation:

1. Part Program Storage Length (in total)	5120m (2MB)
2. Number of Registerable programs (in total)	1000
3. Part Program Editing	Std.
4. Memory card program entry count extension (Max. 1000)	Std.

C Axis Function:

1. Polar coordinate interpolation	Std. (G112/G113)
2. Cylindrical interpolation	Std. (G107)
3. CS contouring control	Std.
4. Coordinate System Rotation	Std.

OPTIONS

With hardware included

1. Tool life management	☐
2. Program restart	☐
3. Data server (with PCB and CF card 1GB)	☐
4. Ethernet/IP (to be linked to robot)	☐
5. PROFIBUS-DP (to be linked to robot)	☐
6. CC-Link (to be linked to robot)	☐
7. Fast Ethernet (required for SCADA Web with additional RJ45 port)	☐

Without hardware included

8. Circular thread cutting (G35, G36)	☐
9. AICC-1 (G5.1 Q1, 40 blocks)	☐
10. AICC-2 (G5.1 Q1, 200 blocks)	☐
11. Helical interpolation (C-axis only)	☐
12. Arbitrary speed threading	☐

Standard Accessories



- Power chuck with soft jaws
- Programmable tailstock
- Chip conveyor with cart
- Automatic forced lubrication
- Fully enclosed splash guarding
- Tool holders (excl. VDI / BMT turret system)
- Fanuc Oi-TF Plus (10.4") control
- 3 step warning light
- Air conditioner for electrical cabinet
- Fanuc e-books (CD)

Optional Accessories

- Kitagawa® chuck
- Hard jaws
- Tailstock center
- Manual tool presenter
- Automatic tool presenter
- High pressure coolants
- Auto door
- Air blow system
- Oil-mist remover
- Oil skimmer (std. on Vturn-40,45)
- Steady rest (Manual or hydraulic)
- C-axis with live tooling
- High/low chucking pressure
- Fanuc manuals



Technical Drawings

Vturn-40 (Vturn-45)

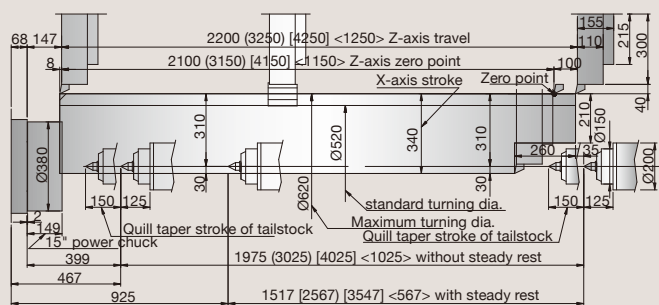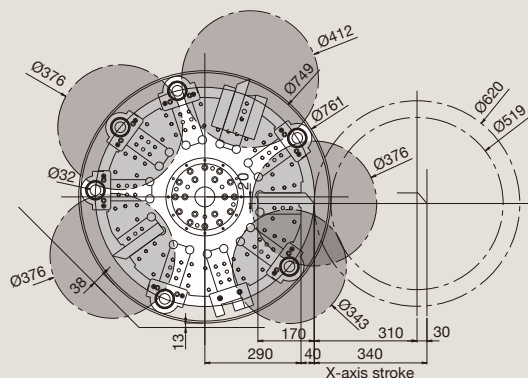



Vturn-40/220 (Vturn-40/325) [Vturn-40/425] <Vturn-40/125>

Vturn-40CV (Vturn-45CV)

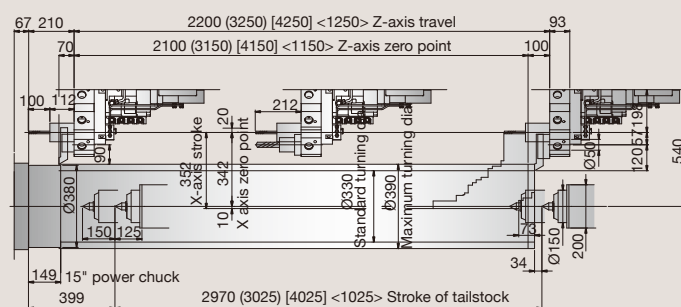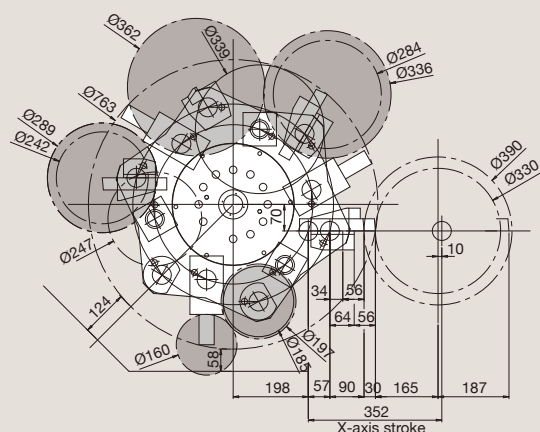

Vturn-40/220 (Vturn-40/325) [Vturn-40/425] <Vturn-40/125>


Vturn-40CM (Vturn-45CM)

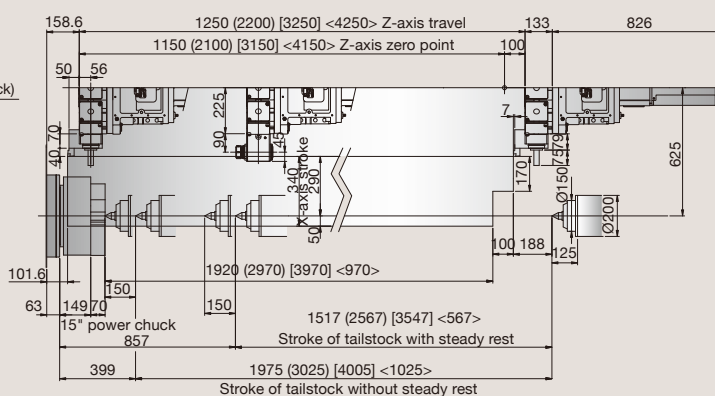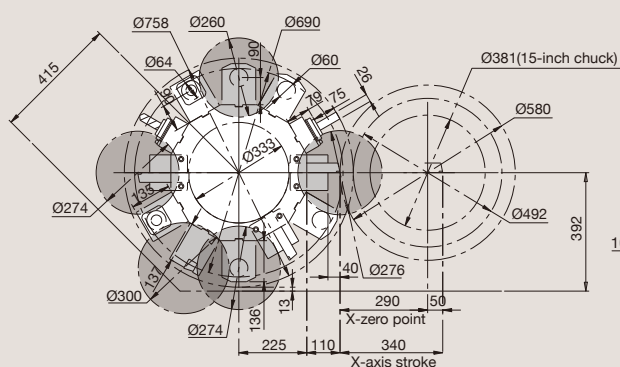


Vturn-45/220 (Vturn-45/325) [Vturn-45/425] <Vturn-45/125>

Technical Drawings


Vturn-40YCM (Vturn-45YCM)

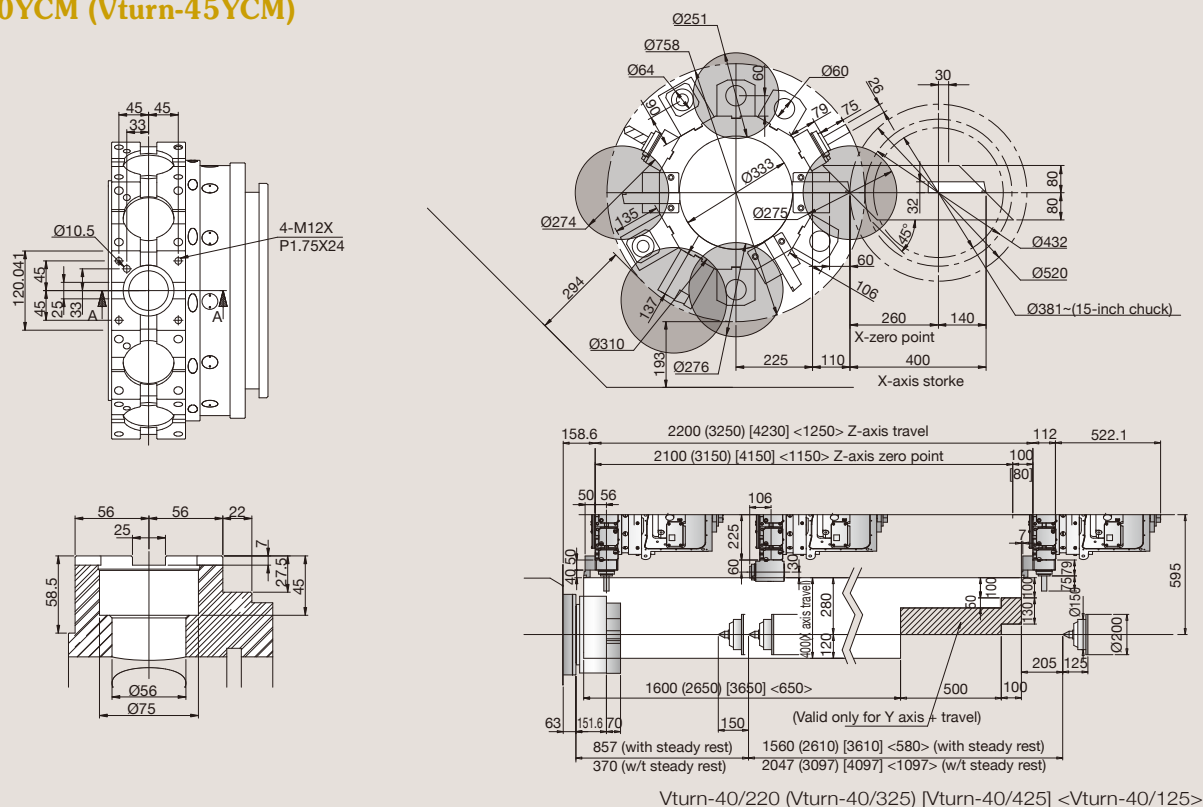

Vturn-46

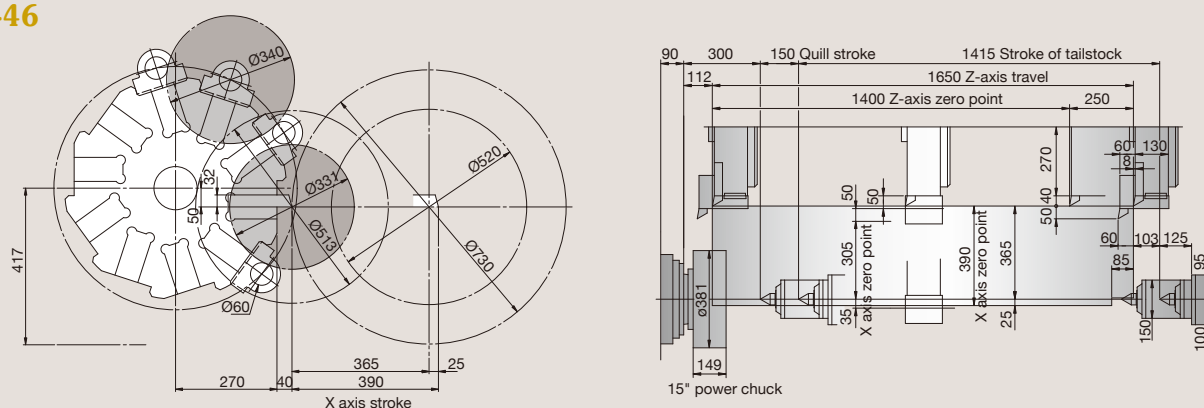

Vturn-46CV

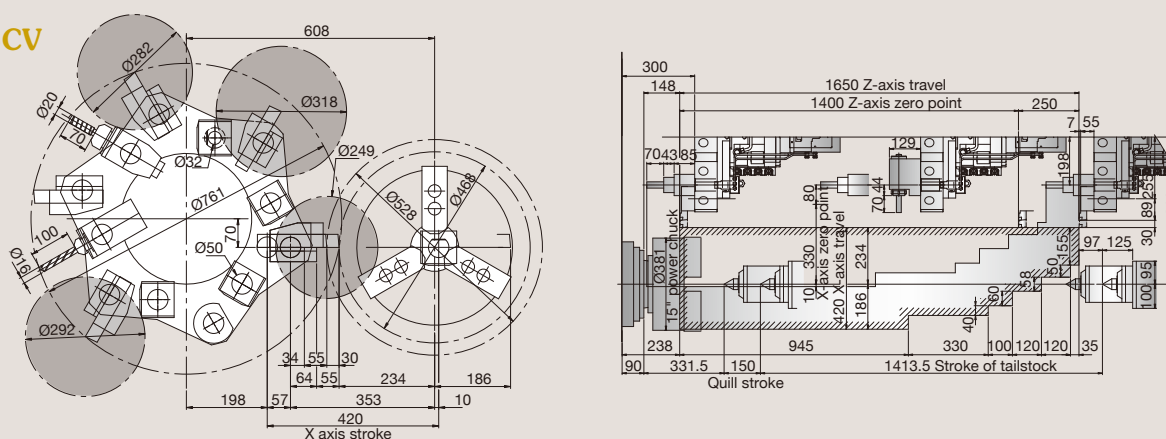

Technical drawings of the Vturn-40(45)/125 (STD, CV, CM) machine tool, showing three views: front, side, and top. Dimensions are provided in millimeters.

Front View (Top):

- Overall width: 5373
- Overall height: 1974
- Distance from front face to center of rotation: 1515
- Distance from front face to rear face: 2037
- Distance from front face to rear face (lower section): 1534
- Distance from front face to rear face (lower section, lower part): 1208
- Distance from front face to rear face (lower section, lower part, lower part): 910
- Distance from front face to rear face (lower section, lower part, lower part, lower part): 460
- Distance from front face to rear face (lower section, lower part, lower part, lower part, lower part): 91

Side View (Bottom Left):

- Overall width: 2152
- Overall height: 2316
- Distance from front face to center of rotation: 600
- Distance from front face to rear face: 1215
- Distance from front face to rear face (lower section): 635
- Distance from front face to rear face (lower section, lower part): 597

Top View (Bottom Right):


- Overall width: 5852
- Overall height: 1832
- Distance from front face to center of rotation: 195 (GTP Gear Box)
- Distance from front face to rear face: 4265
- Distance from front face to rear face (lower section): 1587
- Distance from front face to rear face (lower section, lower part): 1254 (CE 1120)

Technical drawings of the Vturn-40(45)/220, 325, 425 YCM machine. The top drawing is a side view showing dimensions E, F, G, and a height of 700. The bottom left drawing is a front view showing dimensions A, B, 706, 1254, and 597. The bottom right drawing is a side view showing dimensions H, I, J, and K.


ITEM \ MODEL	A	B	C	D	E	F	G	H	I	J	K
Vturn-45/220	2370	2385	2737	2037	1679	1130	5633	7110	1477	1254 (CE 914)	1847
Vturn-45/325	2370	2385	2737	2037	1734	1244	6955	8432	1477	1254 (CE 914)	1807
Vturn-45/425	2370	2398	2737	2037	1852	1244	8273	9750	1477	1254 (CE 914)	1807

Machine Layout (excl. Transformer)

Vturn-40/125 with built-in spindle

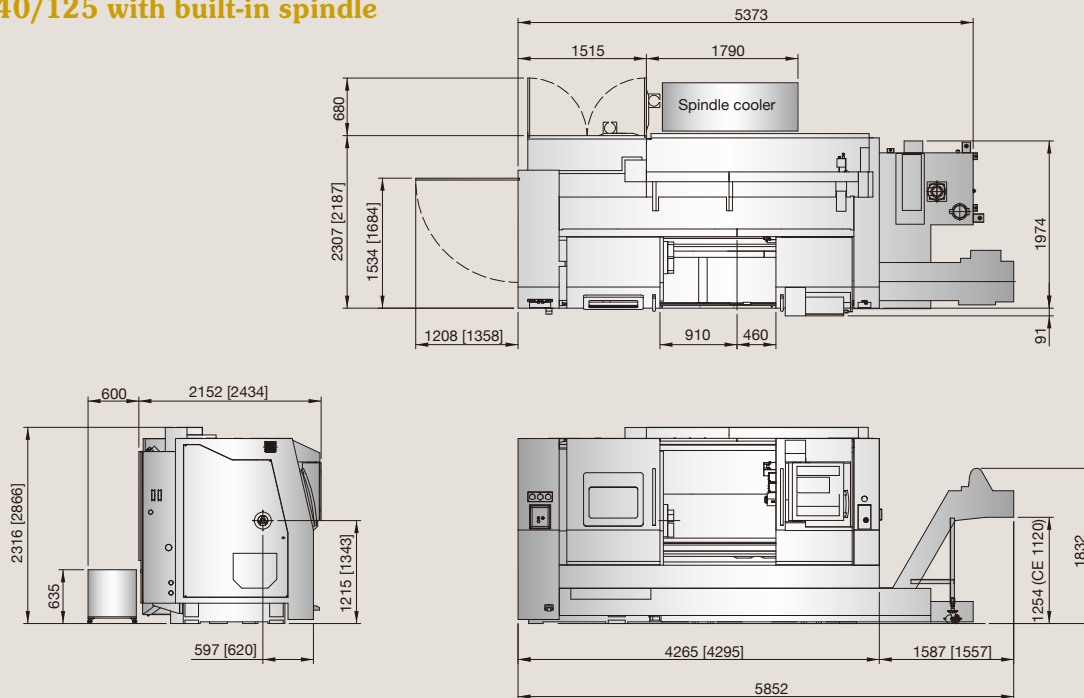



Vturn-40/220, 325, 425 YCM with built-in spindle

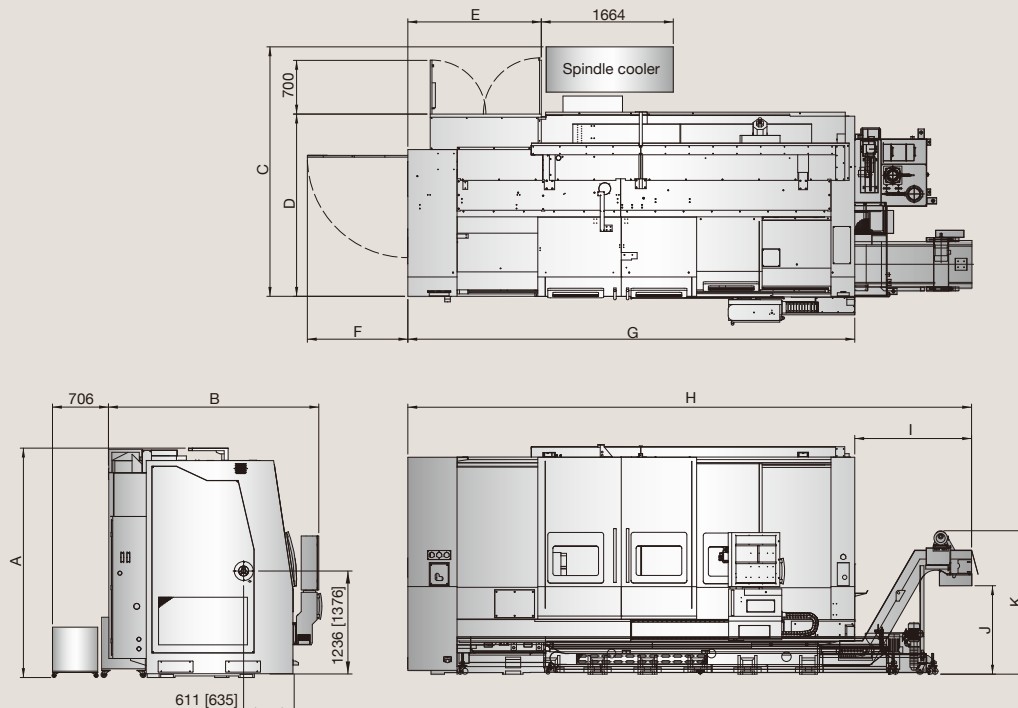

ITEM \ MODEL	A	B	C	D	E	F	G	H	I	J	K
Vturn-40/220 (Y)	2370 (2920)	2385 (2654)	2909 (3168)	2037 (2297)	1679 (1682)	1130 (1330)	5633 (5633)	7110 (7110)	1477 (1477)	1254 (CE 914)	1847 (1847)
Vturn-40/325 (Y)	2370 (2920)	2385 (2654)	2909 (3184)	2037 (2312)	1734 (1734)	1244 (1330)	6955 (6955)	8432 (8665)	1477 (1710)	1254 (CE 914)	1807 (2148)
Vturn-40/425 (Y)	2370 (2920)	2385 (2654)	2929 (3204)	2037 (2312)	1852 (1852)	1244 (1330)	8273 (8323)	9750 (10033)	1477 (1710)	1254 (CE 914)	1807 (2184)

Machine Layout (excl. Transformer)

Vturn-46

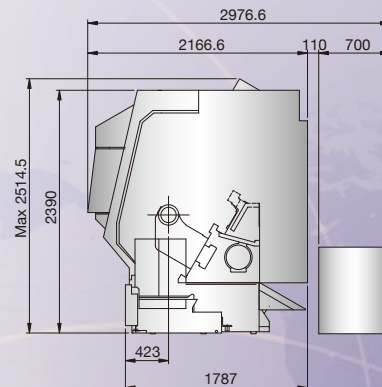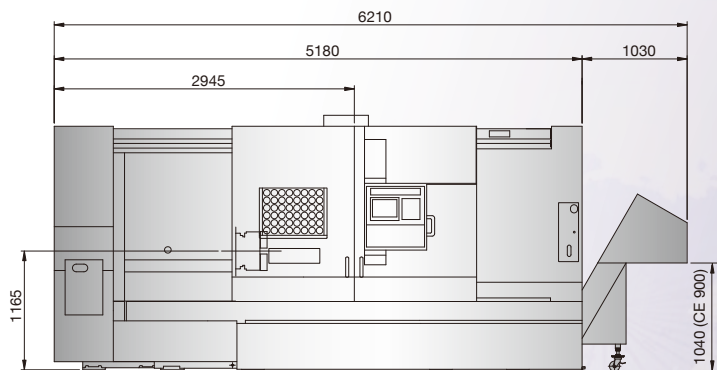

Vturn-NP16 with built-in robot



Vturn-A200Y with Y-axis BMT turret



Vturn-V1000 vertical lathe

VICTOR TAICHUNG profile:
Sales turnover: USD 207 mil's (in 2021)*
No. of employees: 778
*Exchange rate: 1 USD=28 TWD.



THE VICTOR-TAICHUNG COMPANIES



HTL

VTL

VMC

HMC

XMT

PIM

TAIWAN

<http://www.victortaichung.com>

E-mail :info@mail.or.com.tw

- Victor Taichung Machinery Works Co., Ltd.
No. 1, Jingke Central 2nd Rd., Nantun Dist.,
Taichung 40852, TAIWAN, R.O.C.
TEL : 886-4-23592101
FAX : 886-4-23593389

FRANCE

- Victor France
TEL : 33-1-64772000
FAX : 33-1-64772063

GERMANY

- Victor GmbH
TEL : 49-2261-478434
FAX : 49-2261-478327

SOUTH AFRICA

- Victor Fortune (PTY) Ltd.
TEL : 27-11-3923800
FAX : 27-11-3923899

MALAYSIA

- Victor Machinery (M) SDN. BHD.
TEL : 60-3-56337180
FAX : 60-3-56337191

THAILAND

- Victor CNC (Thailand) Co., Ltd.
TEL : 66-2-9263735
FAX : 66-2-9032373

INDONESIA

- PT. Victor Machinery Indonesia
TEL : +62-21-88958504
FAX : +62-21-88958513

USA

- Fortune International Inc.
TEL : 1-732-2140700
FAX : 1-732-2140701

CHINA

- Victor Taichung
Machinery (Shanghai)
TEL : 86-21-59768018
FAX : 86-21-59768009